

## PRODUCT DATA SHEET FREEslide

Parallel lift system for wallcabinets & microwave compartments in high cabinets

- Multi-Position-Stopp & stepless force adjustment
- ClickFixx und 3D-frontadjustment
- Positioning pins
- Premounted screws




Cabinet type			WALL UNIT / HIGHBOARD / LIFTER
Fitting type			Parallel flap fitting
Application area			FREEslide
(Carcase dimensions in mm)	Front panel width		Up to 1800
(Carodoc amionologic in min)	Front panel height		350 to 600
	Front panel weight	Height-dependent	1.8 to 21.4 kg
	Front panel thickness	Max.	No restrictions
Installation dimensions			
(Carcase dimensions in mm)	Required height	Carcase to ceiling	Dependent on lever arm length
	Clear depth		277
	Clear height		Dependent on lever arm length
	Centre shelf recess		54
Movement system			
	Drive/power pack	Coiled compression spring	4 variants
	Lever arms		4 variants
Design variants			
	Colours/finishes	Cover	Grey or white
		In planning	Other finishes
		Fitting arm	Nickel-plated
Assembly/adjustment			
(in mm)	ClickFixx	Front panel connectors	X
		Torsion bar	X
	Drilling pattern	System 32 for carcase	X
		System 32 for front panel	X
	Force adjustment	Nonius	X
	3D adjustment	Height	+/- 1.5
		Width	+/- 1.5
		Tilt	+/- 1.5
	With positioning pins		X
	With premounted screws	Euro	X
Comfort features			
	SoftSTOPP		X
	Multi-Position-STOPP		X
	eTouch		3rd quarter 2014
Weight			
(in kg) Materials	Fitting	Incl. front panel connectors	1.5
materialo	Fitting	Steel	X
	Cover	Plastic	X
Accessories		Tuodo	^
	Adapter for 20x20 aluminium frame		X
	Push-to-open		-

20140220\_PDB\_FREEslide\_EN.doc 1/2



## PRODUCT DATA SHEET FREEslide

Packaging units		
Single	1	X
Multiple	5	-
	10	X
Returnat	ole	In preparation
Quality certificate		
LGA		In planning
Dates		
Product	release	Summer 2014

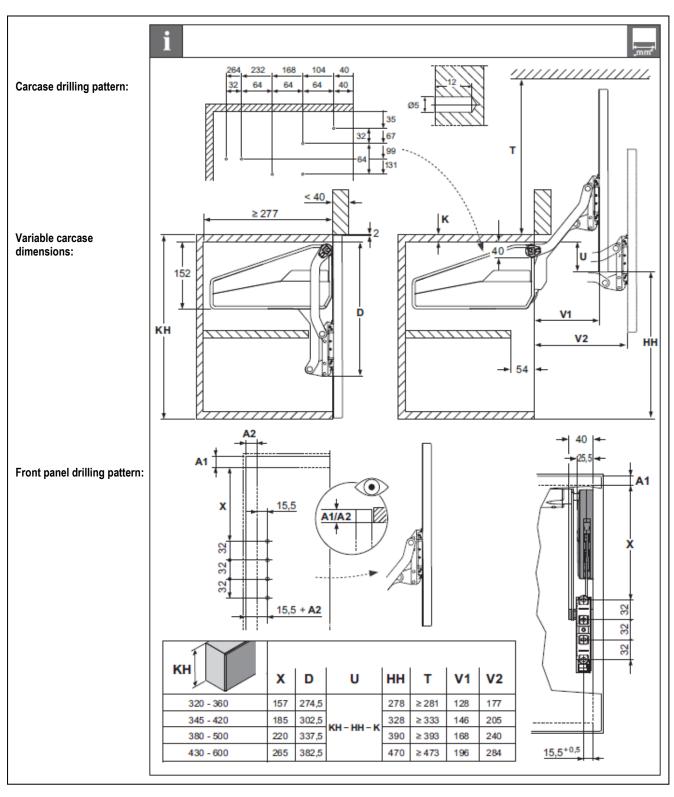

20140220\_PDB\_FREEslide\_EN.doc 2 / 2