



VENID

As part of a modern work and conference environment, the VENID desk connection panel offers both exceptional design and high functionality. The original tabletop material can be integrated quickly and easily into the mounting frame, so the tabletop and connection panel form a harmonious unit.

Perfectly integrated into the surface, VENID not only looks elegant but also offers a practical benefit: used cables can be stowed away conveniently in the table. The cover, which can be folded open in either direction, is easy to operate and leaves space for the lateral cable guide. Two socket strips can be integrated into the VENID tray and equipped individually.

BENEFITS

- **Harmonious surface thanks to visually smooth integration**
- **Can be operated from either side for ease of use**
- **Practical benefit of cable storage**
- **Flexible equipment options for the socket strip**

VENID

#	
---	---

VENID mounting frame

935.000 Aluminium black (anodised, E6/EV6) | With mount to clip in the VENID tray | Lid can be opened on both sides with end stop | The original tabletop cut-out is inserted into the inner frame and screwed tight | Max. tabletop thickness from 14 to 25 mm | Dimensions: 371 x 180 x 57 mm | Mounting depth of frame without mounting clips: 45 mm



935.000



935.100

VENID tray

935.100 Sheet steel, black powder-coated | Clips into VENID mounting frame | Mount for two power strips | Tray dimensions: 334 x 173 x 79 mm | Mounting depth of frame with tray and power strip: 155 mm

VENID power strips

#								
---	---	---	---	---	---	---	--	---

Medium | Anodised aluminium profile | Power input: 0.2 m cable and GST18 plug | Incl. mounting bracket | Width 229 mm

936.009	3						35°		1
936.001	2						35°	A/A 15W	1
936.007	2						35°		2
936.003	1						35°	A/A 15W	2
936.011		2					45°		1
936.005		1					45°	A/A 15W	1
936.010			3				35°		1
936.002			2				35°	A/A 15W	1
936.008			2				35°		2
936.004			1				35°	A/A 15W	2
936.015				3 (T13)			0°		1
936.014				2 (T13)			0°	A/A 15W	
936.013				1 (T13)			0°	A/A 15W	2
936.012					2		35°		1
936.006					1		35°	A/A 15W	1



936.007



936.005




936.004



936.015

← Cover can be opened in both directions. →

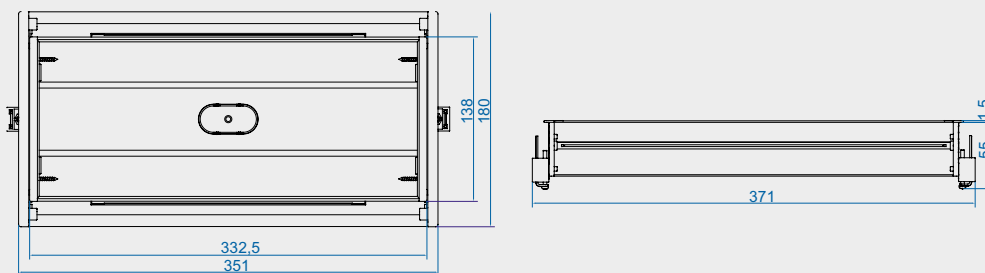

VENID mounting frame | Dimensions in mm



To improve stability, it is recommended that the VENID tray is used in combination with the VENID mounting frame.

For suitable device supply cables, see page 62 onwards.

For suitable **Custom Modules**, see page 178 onwards.